

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 29 TOWNSHIP 16 RANGE 3

DATE: 6-9-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 2-21-99

IN. S.P.C. E ZONE NAD '83

NAME: 16032901

N: 506511.4255(m)

E: 51323.3751(m)

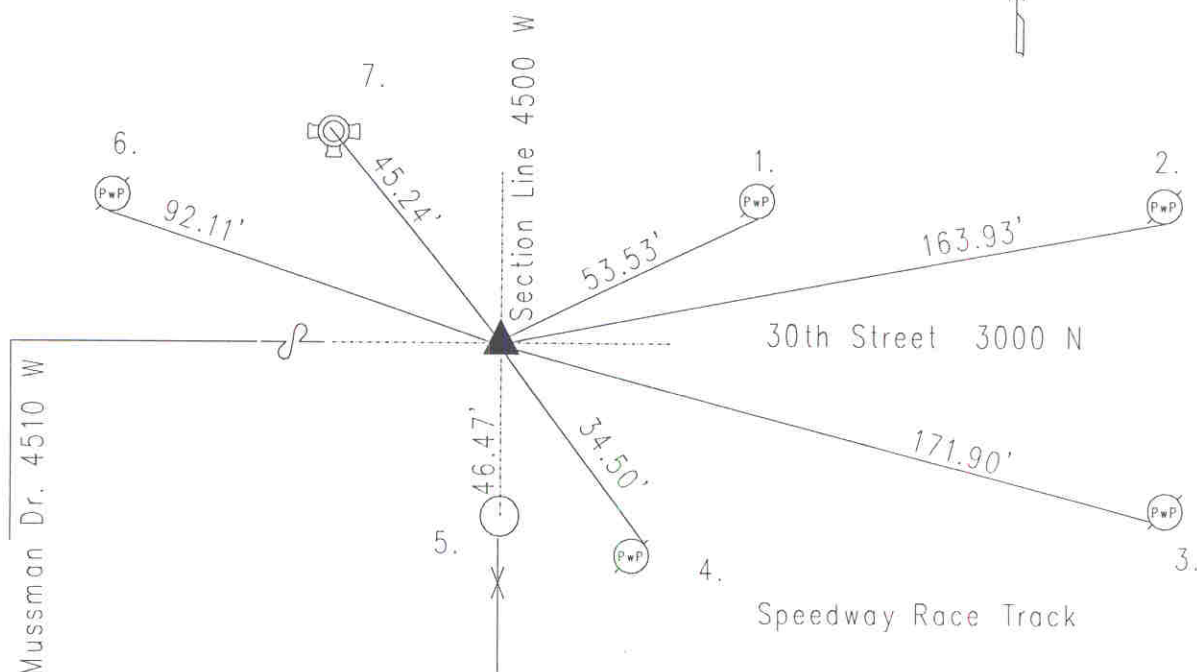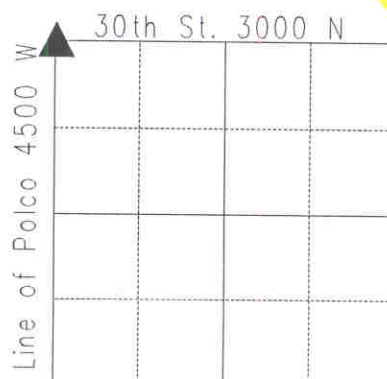

Original post set 1820 by Laughlin with witnesses: 20" elm N 77 1/2 W 15 links
8" white ash S 81 E 38 links per Marion County Atlas pg. 7. Hosbrook 4-16-1855
called stone with witness: 16" ash S 28 W 26 links, 12" ash S 54 E 20 links,
3-4-47 Thompson called stone. Monroe 8-5-53 called same. Schultz 7-20-62
called cut 'x'. Miller 12-23-75 called PK nail. Excavated 11-20-90 and Harrison
set. Stone found 18" down. Re-tied 9-10-96. Re-tied 2-21-99 by Wilcoxon.
Re-tied 6-9-04 by Wilcoxon. 16032901

REF.	DISTANCE	DESCRIPTION
1.	53.53'	Mag nail w/brass washer S PwP# no# 6"up
2.	163.93'	Mag nail w/brass washer S PwP#73-468 A 8"UP
3.	171.90'	Mag nail w/brass washer sw pWp#1-428 b 8"UP
4.	34.50'	Mag nail w/brass washer E PwP#33-427 B 12"up
5.	47.46'	Face of steel corner fence post
6.	92.11'	Mag nail w/brass washer S PwP#74-424A 18"up
7.	45.24'	Top nut of fire hydrant